


Lantech[®]**CS-300-Tape Case Sealer**

- ✓ Continuous motion operation
- ✓ Reliable performance
- ✓ Easy adjustment to different case sizes
- ✓ Wide range of cases
- ✓ Optional case infeed guiding with separator
- ✓ Optional bottom tape sealing

**CONTROLLED CASE TRANSPORT**


Spring loaded side belts take over the case at the infeed side. The spring load functionality deals with tolerances in case width.

**PRE FOLDING THE SHORT FLAP**

Wide and thin corrugated cases can be handled because of pre folding the first short flap. This helps avoiding packaging damage and improves the reliability of your packaging process.

**TOP CLOSING**


The side belts transport the case underneath special designed stainless steel curves. Due to the movement the long flaps close perfectly.

**EASY TAPE CHANGE & CASE REMOVING**

Changing the Tape Head or resolving machine jams is fast and safe. Push one button and the quick release of the upper closing unit creates the spaces for the operator to change the tape or to remove a jammed case.


Lantech[®]

Technical Specifications

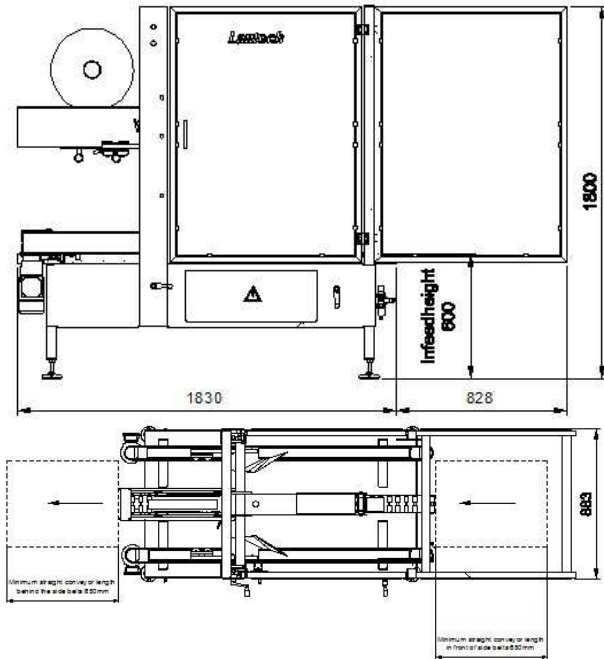

Case dimensions

	Minimum	Maximum
Length (A)	200 mm	650 mm
Width (B)	120 mm	510 mm
Height (H)	120 mm	600 mm



Case quality

Corrugation B-wave, C-wave, E-wave or combinations of these

Capacity

Maximum 30 cases per minute

Case top closure

Tape

Air & power

Electrical connection	: 3 x 400 V - 50Hz - N-earthed
Air pressure	: 6 bar
Compressed air connection	: 1/4

Machine dimensions

Machine length	: 1830 mm
Machine width	: 883 mm
Machine height	: 1800 mm ± 30mm
Out feed height	: 600 mm ± 30mm

Operation temperature

The machine is suitable for operation in a dry environment at a temperature between +3°C and +40°C