




Semi-Automatic Tape Sealer  
Up to 30 cases per minute



**RSC Case**  
The BEL 151  
seals RSC  
cases.

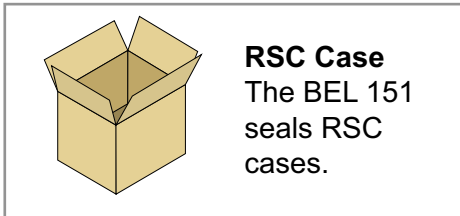


*System shown with optional  
roller conveyor.*

## Semi-Automatic, Bottom-Only Case Taper



**Squareness Assured**  
BEL's innovative and powerful Uni-Drive system synchronizes conveyor belt speed, eliminating case skew, so that cases leave the machine squarely taped.



**Lasting Performance**  
The BEL 151 features heavy duty, corrosion resistant aluminum C-Beam construction and compact design to provide lasting performance in the most demanding production environments.



**Superior Tape Application**  
The BEL 151 is equipped with state-of-the-art DEKKA High Performance stainless steel tape heads that are easily loaded in or out of the machine in 30 seconds or less.



**Easy Case Change**  
The BEL 151 is user-friendly, enabling the operator to make box size changes from either side of the machine quickly and easily, in 30 seconds or less.

Case Sealer  
BEL 151

# BEL 151 Semi-Automatic, Bottom-Only Case Taper

## BEL 151 Features

- Paint free, corrosion resistant frame, guards against contamination from flaking or peeling paint.
- Built-in safety systems that protect against power interruption or overload.
- Uni-Drive squaring mechanism that results in more presentable cases.
- Quick and easy maintenance, resulting in a minimum amount of downtime.
- Standard DEKKA 22 Stainless Steel 2" tape heads and optional DEKKA 3" tape heads available.

## Complete Solution



### BEL 505 Case Former

The BEL 505 improves efficiency and ergonomics. Inserting a case into the BEL 505 results in all four bottom flaps being automatically folded, leaving hands free to pack.



### BEL 150 Uniform Case Taper


The standard BEL 150 model is available to accommodate top and bottom case sealing.



### BEL 150SS Stainless Steel Case Taper

The stainless steel is available for washdown environments.

## How the BEL 151 Works



**RSC Case**  
The BEL 151 seals RSC cases.




### 1 Quick Change Handle

Width is adjusted using a hand crank, which increases or reduces size in seconds.



### 2 Uni-Drive Case Transport

Uni-drive system synchronizes the case conveyor, assuring case squareness during taping.



### 3 Bottom Sealed

Superior case sealing performance is achieved with its quality tape application. The BEL 151 comes standard with DEKKA tape heads.

## BEL 151 Specifications

Case Size Range	Length	Width	Height
Minimum	8" 203 mm	5" 127 mm	4" 101 mm
Maximum	unlimited	18" 457 mm	unlimited
<b>Infeed/Outfeed Height (with adjustable foot pads)</b>			
Note: Castors add 6" to minimum and maximum height.			
Minimum	23 1/2" (597 mm)		
Maximum	32" (813 mm)		
Machine Speed: Up to 30 cases per minute. Oversize model available. Consult factory for case size ranges.			

Specifications are subject to change without notice.



powered by Pro Mach 

**shorr** | packaging corp.  
shorr.com 888.885.0055

Backed by Wexxar's warranty and experienced, nationwide service team.